




# Fiber Optic Switch

FBG switch is designed to increase the number of channels of an FBG Interrogator.

It can be mounted in a 19" rack for easy installation and operation.

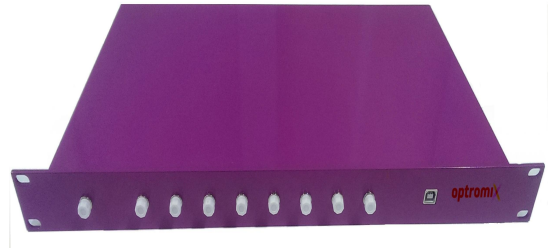

## *Main technical parameters:*

Wavelength range, nm	1270 - 1670
Number of optical channels	4, 8, 16, 32, 64
Mode	SM/MM
Insertion loss, dB	1.3
Switching time, sec	<1
Connectors	FC/APC
Communication interface	Ethernet
Operating temperature, °C	0...+50
Working conditions, humidity,%	0 - 90 no condensation
Dimensions, mm	480 x 84 x 400
Weight, kg	2.5

**Optromix, Co.**

2464 Massachusetts Ave, Suite 220 Cambridge, MA 02140

office: +1-617-558-9858, e-mail: [info@optromix.com](mailto:info@optromix.com)