Multiplexers

Multiplexer is designed to increase the number of channels of an interrogator.
It can be mounted in a 19″ rack for easy installation and operation.

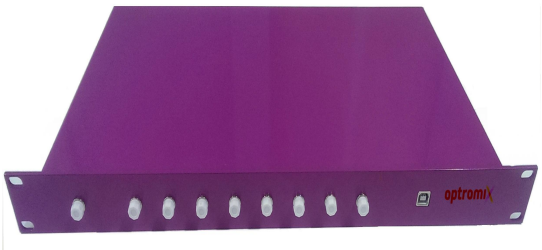

Main technical parameters:

Wavelength range, nm	1270 - 1670
Number of optical channels	4, 8, 16, 32, 64
Mode	SM/MM
Insertion loss, dB	1.3
Switching time, sec	<1
Connectors	FC/APC
Communication interface	Ethernet
Operating temperature, °C	0...+50
Working conditions, humidity,%	0 - 90 no condensation
Dimensions, mm	480 x 84 x 400
Weight, kg	2.5

Optromix, Co.
2464 Massachusetts Ave, Suite 220 Cambridge, MA 02140
office: +1-617-558-9858, e-mail: info@optromix.com